


# BAIRD Non-Penetrating Supporting System

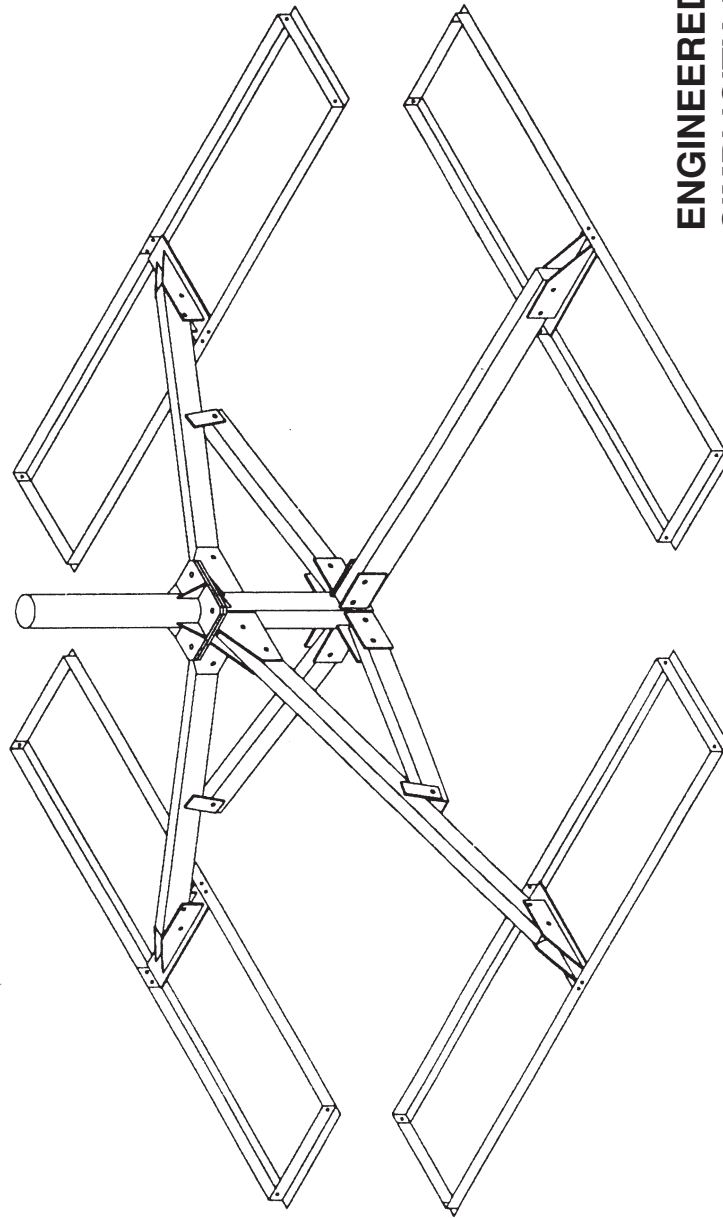

## ENGINEERED FOR RELIABILITY, SIMPLICITY AND DURABILITY

1. Typical usage: Antenna size up to 10' (3.0M) for transmit and receive.
2. Dropped leg to accommodate microwave antennas and low elevation angles.
3. Hot dip galvanized for superior protection.
4. Sets up easily and quickly.
5. Drop shipped direct to installers.

**MODEL: VL-4**



**PRODUCT SPECIFICATIONS**

**MODEL: VL-4**

Non-Penetrating or Penetrating flat roof antenna supporting system.

**TYPICAL USAGE**

1. Handles up to a 10' (3.0M) antenna.
2. Ku & C band - transmit and receive.
3. Pad areas - 8.3, 16.7, 25.0 and 33.3 sq.ft.
4. Footprints
  - a. 1'4" x 6' = 10.30' x 10.30' = 106.09 sq.ft.
  - b. 2'8" x 6' = 12.97' x 12.97' = 168.22 sq.ft.
  - c. 4' x 6' = 15.64' x 15.64' = 244.61 sq.ft.
  - d. 5'4" x 6' = 18.30' x 18.30' = 334.89 sq.ft.

Finish - Hot dip galvanized  
 Mast Diameter - as required  
 Mast Height - as required

The mount if needed can be equipped with a leveling device.

Ballast required will be recommended based on antenna diameter, type and survival requirements.

It is the customer's responsibility to see that all applicable codes are satisfied. It is suggested that a structural engineer review the application of this product.

An engineering report is available to assist with determining the proper amount of ballast.

A pad can be supplied to isolate the mount from the roof surface.

Under extreme wind conditions the mount should be tethered with cable.

